


SPAX[®]



Everything for your deck

SPAX[®]-D makes screwing easy.

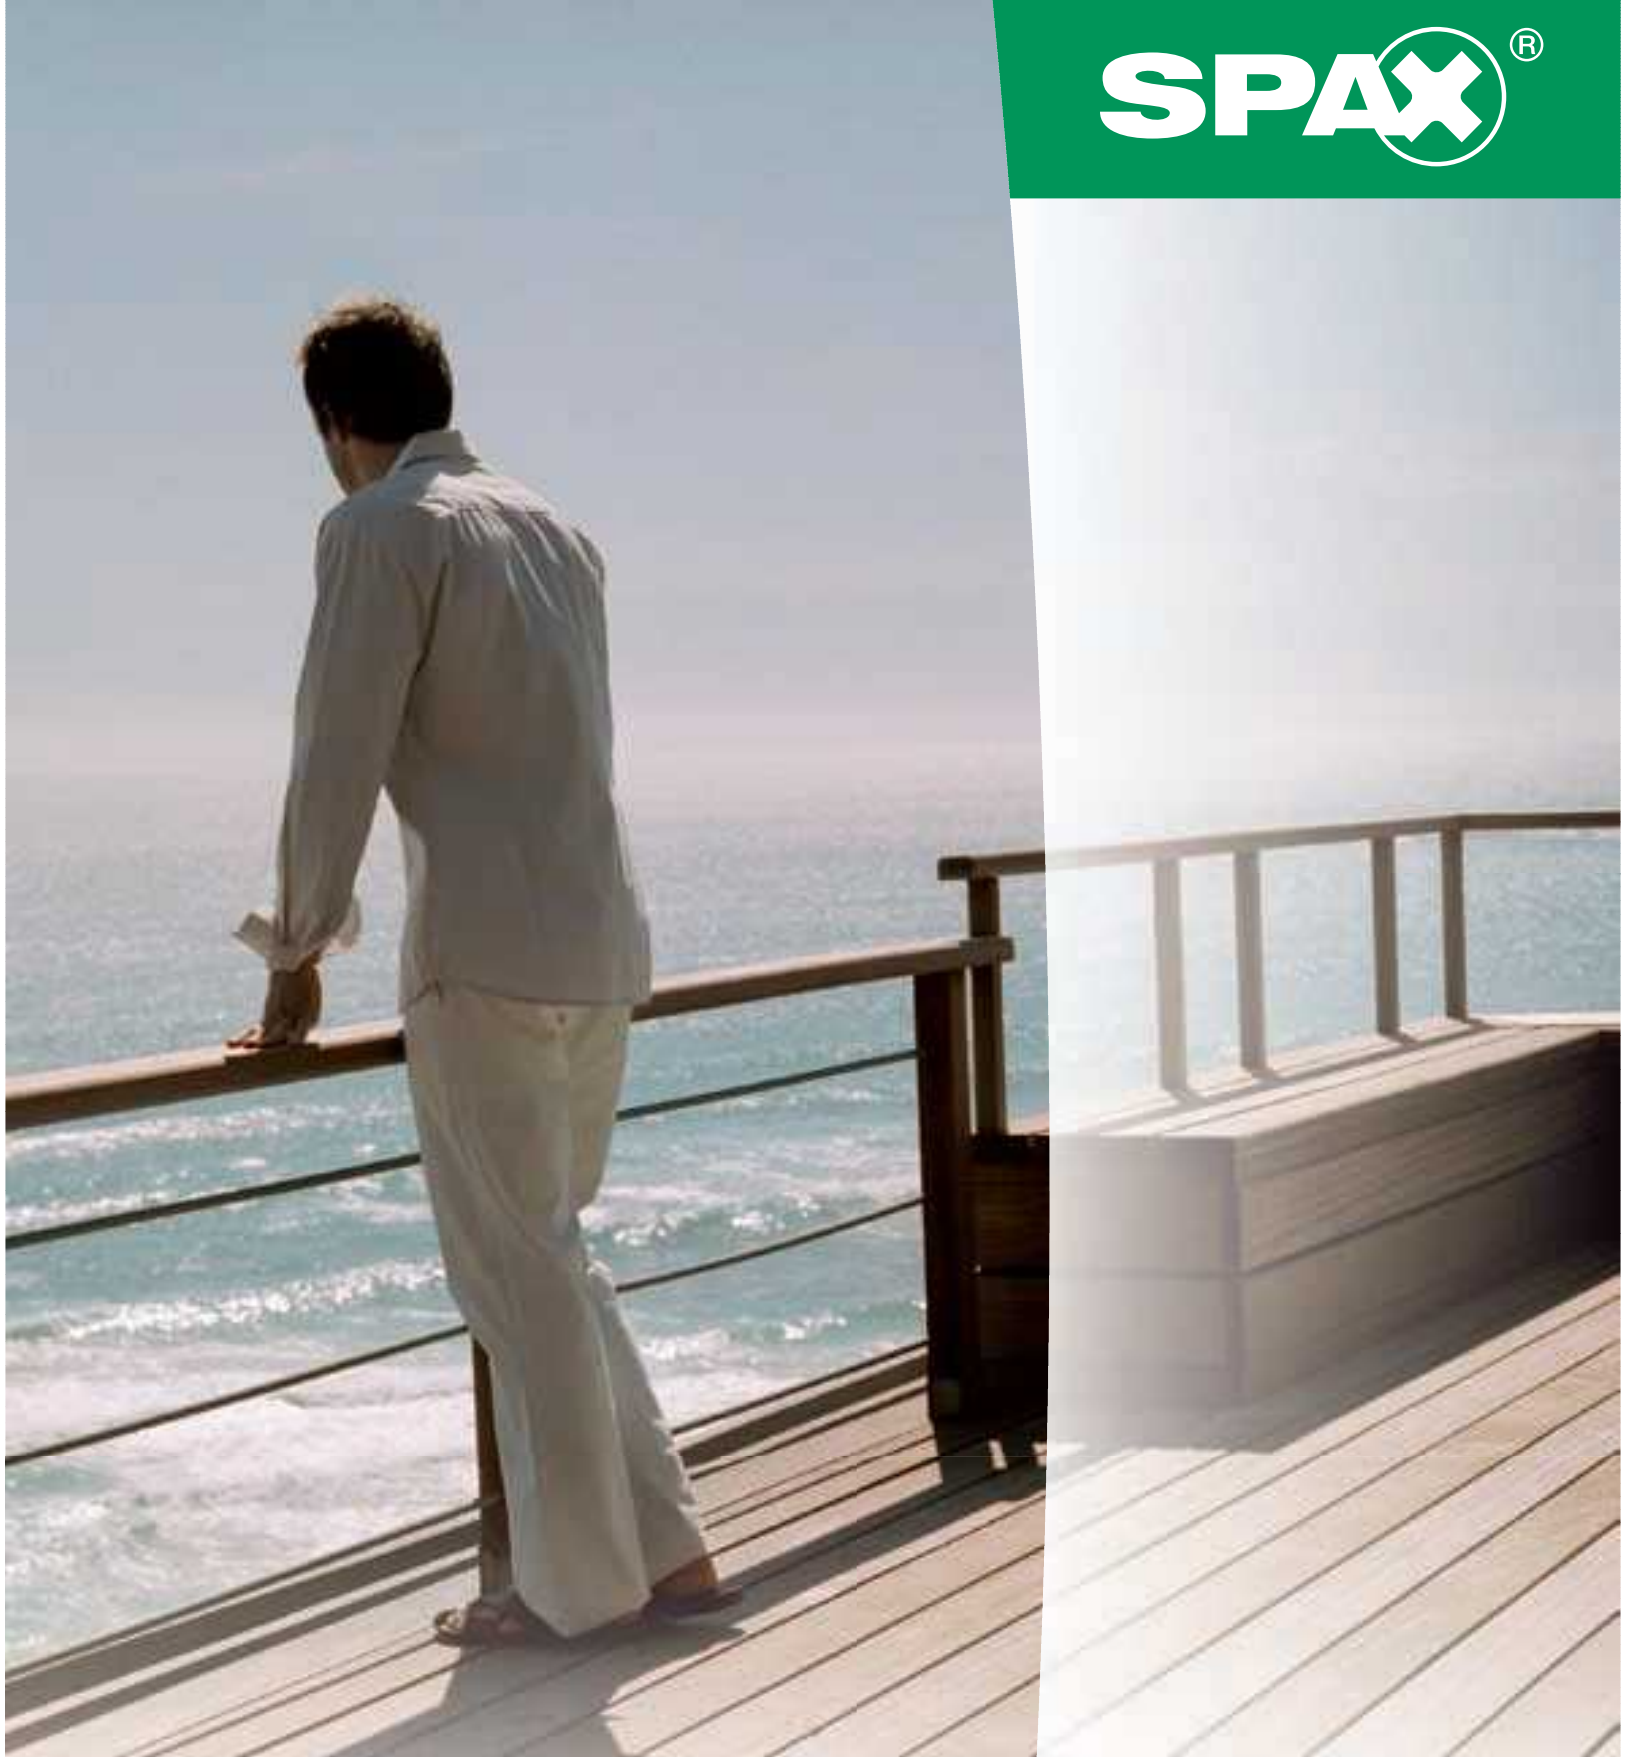

EDELSTAHL[®]
**Rost
frei**
INOX
STAINLESS STEEL



Step 1:

Drill the boards and sub-structure with a SPAX® Ø 3,5 mm wood drill. Use the complete length of the drill. Use the highest possible speed (around 3,000 rpm).



Step 2:


Drive the SPAX®-D straight in with a SPAX® *T-STAR plus* T25 bit. Drive it in without stopping until the head is flush.



Result:

Perfect look thanks to the cylindrical screw head. No splitting of the wood even close to the edge.

The fixing thread ensures a tight joint between the wooden parts (vice effect).

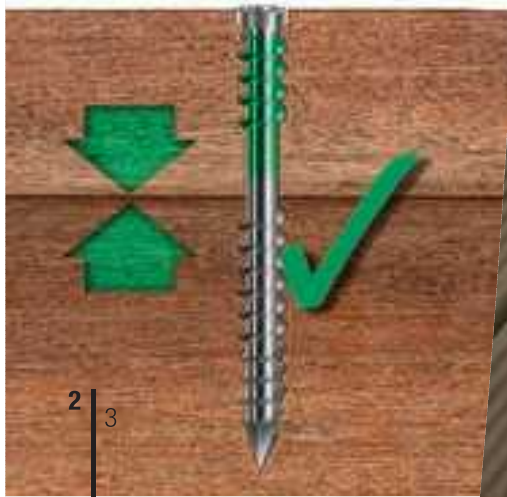

SPAX®-D A2



The unique decking screw for wooden terraces.

SPAX®-D: The outdoor decking screw with three way action.

- Patented ground serrations on the lower thread remove the need for pre-drilling*
- Non threaded shank allows two materials to be pulled together tightly
- Upper thread locks the deck-board securely down tight



Dimensions [mm]				Packaging units	Product code
Thread Ø d1	Total length Ls	Partial thread length LgT	Bit size T	SPAX® BOX [pieces]	
5,0	40	22,5	25	200	0537000500403
	50	22,5	25	200	0537000500503
	60	27,5	25	100	0537000500603
	70	32,5	25	100	0537000500703
	80	37,5	25	100	0537000500803

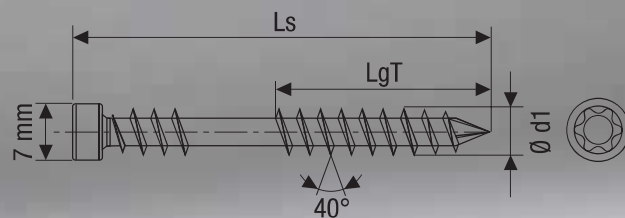

Cylindric head:
Sits flush in the wood.

Fixing thread:
Two wooden planks are drawn close together – the upper plank will not come loose.

Ground serrations:
Ease in turning the screw into the wood right up to the point.

CUT point:
Prevents wood splitting by gripping immediately.



* We recommend pre-drilling in hardwoods





Step 1:

Drill the boards and sub-structure with a SPAX® Ø 3,5 mm wood drill. Use the complete length of the drill. Use the highest possible speed (around 3,000 rpm).



Step 2:


Drive the SPAX®-D straight in with a SPAX® T-STAR plus T25 bit. Drive it in without stopping until the head is flush.



Result:

Perfect look thanks to the cylindrical screw head. No splitting of the wood even close to the edge.

The fixing thread ensures a tight joint between the wooden parts (vice effect).

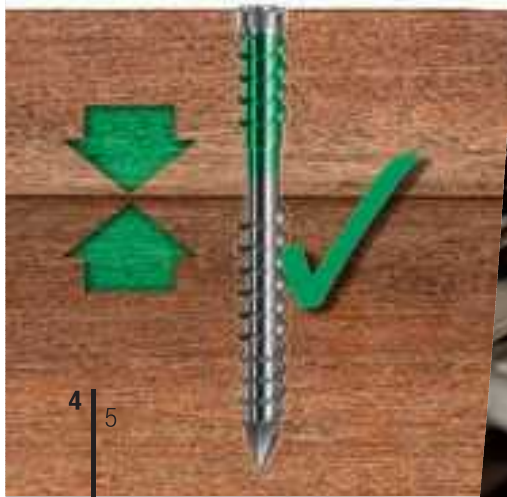


SPAX®-D A4

*The unique decking screw for wooden terraces.
Particularly well suited for coastal areas.*

- Patented ground serrations on the lower thread remove the need for pre-drilling*
- Non threaded shank allows two materials to be pulled together tightly
- Upper thread locks the deck-board securely down tight
- Permanent protection against corrosion



Dimensions [mm]				Packaging units	Product code
Thread Ø d1	Total length Ls	Partial thread length LgT	Bit size T	SPAX® BOX [pieces]	
5,5	40	22,5	25	200	0538000550403
	50	22,5	25	200	0538000550503
	60	27,5	25	100	0538000550603
	70	32,5	25	100	0538000550703
	80	37,5	25	100	0538000550803

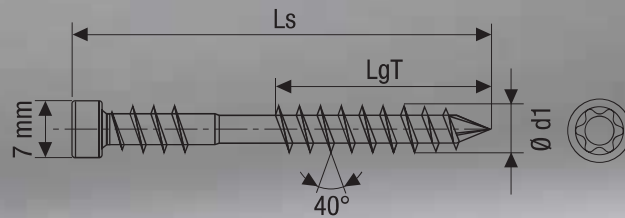

Cylindric head:
Sits flush in the wood.

Fixing thread:
Two wooden planks are drawn close together – the upper plank will not come loose.

Ground serrations:
Ease in turning the screw into the wood right up to the point.

CUT point:
Prevents wood splitting by gripping immediately.



* We recommend pre-drilling in hardwoods





NEW

The additional make the difference.

SPAX®-D Pads



- Protects the wood sub-structure from rising damp.

Dimensions: 100 x 100 x 8 mm

25 pieces bundled

Sales unit 10 x 25 pieces per outer box
Art. No. 5000009186609

SPAX®-D Spacer



- Joint gauge for 4 joint widths:
4 - 5 - 6 - 7 mm
- Check the deck board manufacturers recommended spacing

12 spacers in a handy re-usable plastic tub

Sales unit 3 tubs per outer box
Art. No. 5000009186209

SPAX®-D Cover tape



- Protects the wood sub-structure from rain

Dimensions: 20 m x 76 mm on a roll

Sales unit 2 rolls per outer box
Art. No. 5000009186409

Dimensions: 20 m x 115 mm on a roll

Sales unit 2 rolls per outer box
Art. No. 5000009186509

SPAX®-D Set



- HSS hard wood drill with centering tip
 - Hard wood drill diameter 3.5 mm and **SPAX®-BITS T-STAR plus T25** and instructions
 - Pre-drilling in crest or groove
 - No pre-countersinking required
- 1 set in a bag

Sales unit 10 piece sets per outer box
Art. No. 5000009186709

SPAX®-D Wrench



- For simple alignment of warped cover boards
- Reversible grip for use in both directions
- 2 setting positions enable use with the majority of floor beam widths

Sales unit 1 tool in a box
Art. No. 5000009186309

SPAX[®]-D



T-STAR plus



CUT point



Fixing thread



Cylindric head

SPAX[®]-D:
*The outdoordecking
screw with three way
action:*

- Patented ground serrations on the lower thread remove the need for pre-drilling*
- Non threaded shank allows two materials to be pulled together tightly
- Upper thread locks the deck-board securely down tight

* We recommend pre-drilling in hardwoods

SPAX International GmbH & Co. KG

ALTENLOH, BRINCK & CO - GRUPPE

KÖLNER STRASSE 71-77 · D-58256 ENNEPETAL
TEL + 49-(0) 23 33-799-0 · FAX + 49-(0) 23 33-799-199
info@spax.com · www.spax.com

